

SPEL STORMWATER



SPELBasin[®] Technical Design Guidelines

Table of Contents

| | | |
|-------|---|----|
| 1 | Introduction | 4 |
| 1.1 | Biofiltration | 4 |
| 1.2 | SPELBasin® Modular Biofiltration | 5 |
| 1.3 | Design Drawings/Dimensions..... | 6 |
| 2 | SPELBasin® Applicability Guide | 6 |
| 3 | SPELBasin® Functions | 8 |
| 3.1 | Hydrology..... | 8 |
| 3.2 | Sediment..... | 8 |
| 3.3 | Nutrient Removal | 8 |
| 3.3.1 | Particulate nutrient removal..... | 8 |
| 3.3.2 | Dissolved nutrient removal | 8 |
| 4 | SPELBasin® Design | 9 |
| 4.1 | Outlet invert level (Saturated Zone)..... | 9 |
| 4.2 | Inlet invert level & type | 9 |
| 4.3 | Bypass | 9 |
| 4.4 | Inlet and outlet configurations | 10 |
| 4.5 | SPELBasin® Surface level set-down | 10 |
| 4.6 | SPELBasin® edge interface..... | 11 |
| 4.7 | SPELBasin® Plant selection | 12 |
| 5 | Maintenance | 13 |
| 5.1 | Access | 13 |
| 5.2 | Inlet structures | 13 |
| 5.3 | Sediment & Litter removal | 13 |
| 5.4 | Slotted-drainage pipes | 14 |
| 5.5 | Filter Media Hydraulic Conductivity | 14 |
| 6 | MUSIC Model Application | 15 |
| 7 | Summary..... | 16 |
| 8 | References..... | 17 |

HEAD OFFICE100 Silverwater Road
Silverwater NSW 2128**POSTAL**PO BOX 7138
Silverwater NSW 2128**EMAIL**

sales@spel.com.au

ABN

83 151 832 629

spel.com.au

List of Figures

| | |
|---|----|
| FIGURE 1. SCHEMATIC CROSS-SECTION OF A BIOFILTRATION SYSTEM (SOURCE: WATER BY DESIGN, 2018) | 4 |
| FIGURE 2. BIOFILTRATION MEDIA LAYERS SECTION (SOURCE: WATER BY DESIGN, 2014) | 5 |
| FIGURE 3. SPELBASIN® SCHEMATIC..... | 5 |
| FIGURE 4. SPELBASIN® STANDARD DRAWING..... | 7 |
| FIGURE 5. SPELBASIN® INLET AND OUTLET CONFIGURATIONS..... | 10 |
| FIGURE 6. SPELBASIN® WITH TIMBER SLEEPER EDGE TREATMENT..... | 11 |
| FIGURE 7. SPELBASIN® KERB AND GRATED INLET | 13 |
| FIGURE 8. SPELBASIN® INSPECTION OPENINGS..... | 14 |
| FIGURE 9. SPELBASIN® MUSIC NODE FOR GROSS POLLUTANTS REMOVAL..... | 15 |

List of Tables

| | |
|---|----|
| TABLE 1. APPLICABILITY GUIDE FOR SPELBASIN® | 6 |
| TABLE 2. RECOMMENDED PLANT SPECIES FOR SPELBASIN® | 12 |

Disclaimer

This document is produced for information only. It should not be used as specific advice on individual applications or sites. It is the responsibility of the reader to, in consultation with SPEL Stormwater, determine the suitability and appropriateness of the material herein to your specific site. SPEL Stormwater advises that any actions or inaction based on this document should be done in accordance with professional advice. SPEL Stormwater expressly disclaims any and all liability to any person or organisation in respect of any designs made relying in part of in whole on this publication, except where required by Australian Consumer Law.

HEAD OFFICE

100 Silverwater Road
Silverwater NSW 2128

POSTAL

PO BOX 7138
Silverwater NSW 2128

EMAIL

sales@spel.com.au

ABN

83 151 832 629

spel.com.au

1 Introduction

1.1 Biofiltration

Biofiltration systems are one type of WSUD system that have been implemented in urban areas to manage stormwater by reducing peak flows and downstream pollution (Davis & Birch, 2009; Hunt et al., 2008; Le Coustumer et al., 2012). Biofiltration is also referred to as bioretention, biofilters and rain gardens in various literature. This report will use the terms interchangeably. Biofiltration systems have been popular because of flexibility in their design which assists with simple integration (retrofitting) into existing urban areas (Bratieres et al., 2008), as well as new developments. Biofiltration systems are also considered to add to the benefits of traditional stormwater quality by including aesthetic and social benefits (Mullaney et al., 2015).

Biofiltration relies on physical, chemical and biological processes that occur in the various zones including the extended detention depth, filter media and drainage layers as indicated in Figure 1. Design modifications can include a submerged zone beneath the drainage layer to retain water for enhanced plant survival during dry weather and denitrification. Stormwater is treated as it filters through the vegetated media, utilising plant uptake, microbial processing, adsorption and physical filtration to reduce pollutant loads.

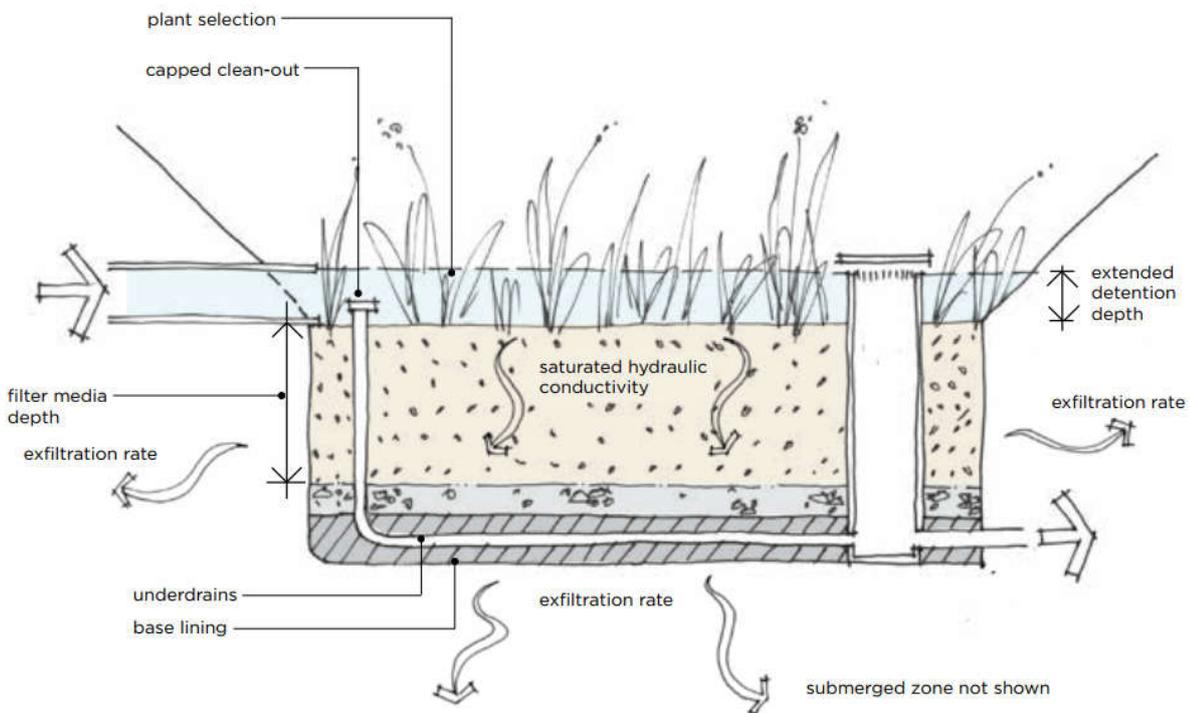


FIGURE 1. SCHEMATIC CROSS-SECTION OF A BIOFILTRATION SYSTEM (SOURCE: WATER BY DESIGN, 2018)

To ensure effective functioning of the biofiltration system, standard specifications of the soil media have been developed (FAWB, 2009). These specifications require traditional biofiltration systems to implement three layers of media, as indicated in Figure 2. These three layers then have a detailed specification that describes the particle size distribution, nutrient content and desired permeability to achieve the stormwater treatment goals.

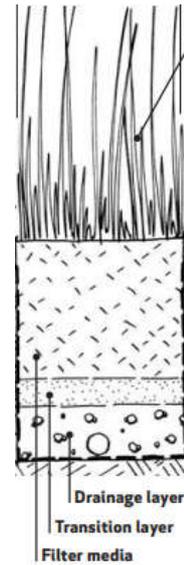


FIGURE 2. BIOFILTRATION MEDIA LAYERS SECTION (SOURCE: WATER BY DESIGN, 2014)

1.2 SPELBasin® Modular Biofiltration

The SPELBasin® modular biofiltration system has a number of similar design features to a traditional biofilter, however, differs in two key areas;

- the use of a proprietary media blend; and
- horizontal flow instead of top-down flow;

The treatment process provided by the SPELBasin® commences with runoff entering via a kerb inlet (1), grated inlet or pipe network, and passing through a coarse sediment screen in the pre-treatment chamber (2). Flow then enters the biofiltration chamber via a pipe located at the base of the structure, and is distributed throughout the filter media through a HDPE geo-grid fitted to the perimeter walls (3). Stormwater filters through the proprietary media blend horizontally and into the centrally-located, slotted collection pipes (4) that discharge to the outlet chamber (5). Flow finally enters the underground stormwater drainage system through a discharge pipe (6) that is controlled by an offset outlet from the base to create a permanently submerged zone. These are shown in Figure 3.

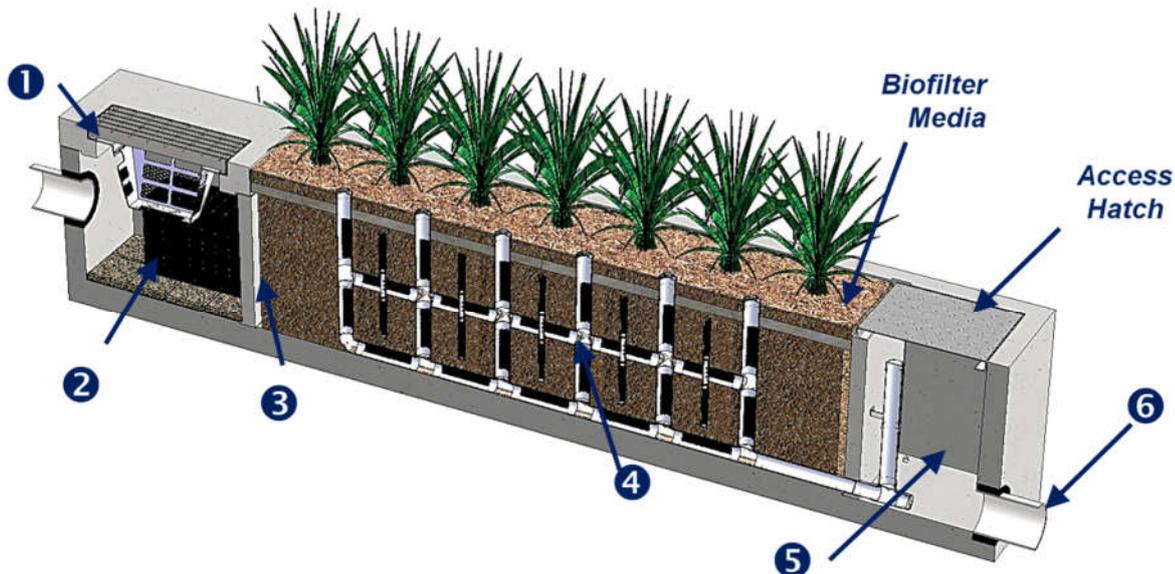


FIGURE 3. SPELBASIN® SCHEMATIC

1.3 Design Drawings/Dimensions

A standard drawing of the SPELBasin® is shown in Figure 4. The SPEL basin has an overall length, width and height of 6120 x 1340 x 1300 mm respectively. The system allows for stormwater runoff to enter via a kerb inlet, a grated inlet or underground pipe. The kerb-type inlet and grated inlet are fitted with a 600 x 600 mm SPEL StormSack which filters gross pollutants from stormwater inflow. Pre-filter cartridges are situated within the pre-treatment chamber to further remove coarse sediment from stormwater that bypasses the StormSack. Flow is horizontally dispersed through a 7.3 m³ biofiltration system with a proprietary biofiltration media blend which drains treated stormwater into the 1.56 m³ discharge chamber. Treated water is discharged through outlet pits and to street drainage.

2 SPELBasin® Applicability Guide

As a modular biofiltration system, there are some considerations that should be incorporated into the design process. These are indicated in Table 1 below.

Table 1. Applicability Guide for SPELBasin®

| Design Consideration | Applicability | Information |
|-------------------------------------|---------------|---|
| At source stormwater treatment | ✓ | SPELBasin® systems are ideal for capturing runoff as it leaves a road, carpark and/or catchment surface. |
| Litter, sediment & nutrient capture | ✓ | Biofilters utilise physical, biochemical and biological processes to remove particulates and dissolved pollutants from stormwater. |
| Urban/civic landscaping | ✓ | The modular configuration allows landscaping to be incorporated into roadsides and traditionally hard cityscapes. |
| Constrained sites | ✓ | SPELBasin® systems can be as small as 0.6% of the contributing catchment, and lifted into difficult to access locations. |
| Moderate to steep gradient sites | ✓ | The fibreglass and precast concrete chambers promote unique alternatives to retaining walls and features in steep sites. |
| Sites with <600mm gradient | ✓ | Designs can accommodate internal invert level increases to achieve discharge on very flat sites, provided a free surface can be achieved. |
| Tidal influence | ✗ | SPELBasin® is not suitable for locations that are subject to tidal influence. |
| Tailwater | ? | Tailwater can affect the treatment flow rate through the SPELBasin®, and should be avoided if possible. Check with SPEL Stormwater. |
| High velocity flowpaths | ✗ | As a filtration and biological treatment system, high velocity flowpaths may cause damage to the SPELBasin®. An external bypass is recommended. |
| Greywater treatment | ✓ | SPELBasin® systems have been observed to remove nutrients and suspended solids from stormwater. They could equally remove nutrients from greywater. |

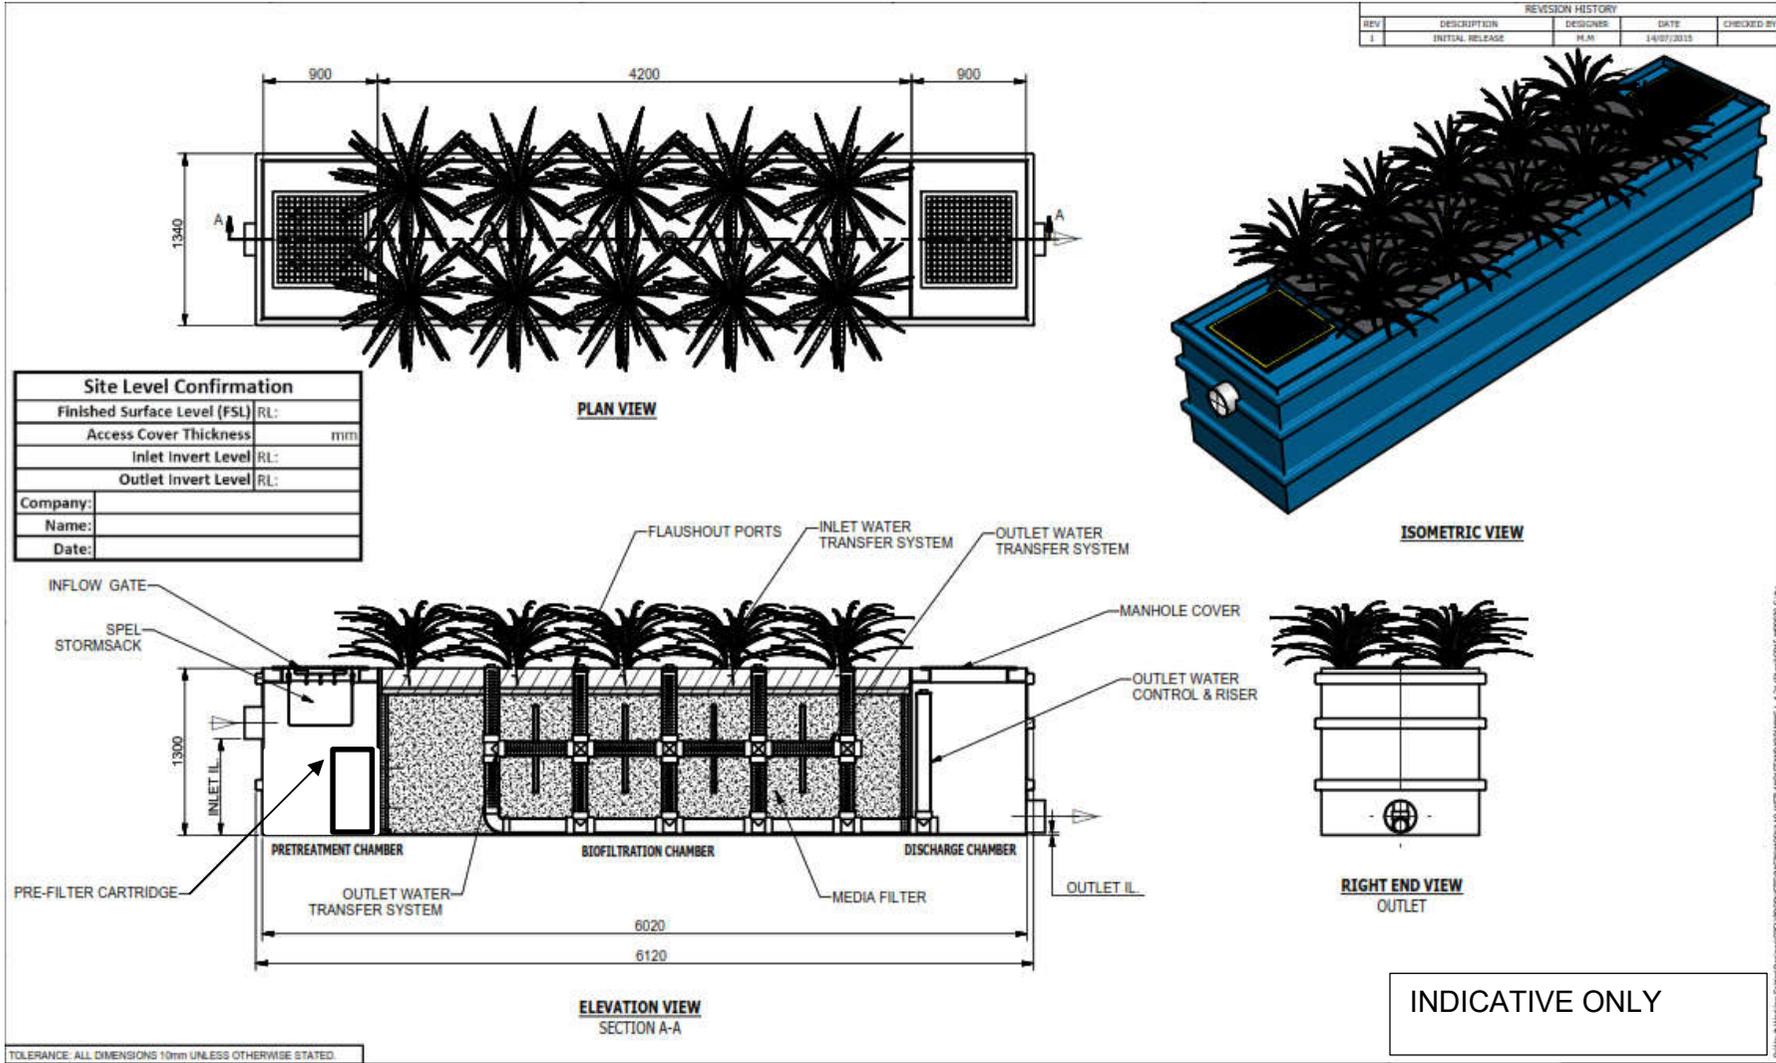


FIGURE 4. SPELBASIN® STANDARD DRAWING

3 SPELBasin[®] Functions

Similar to traditional biofiltration, the SPELBasin[®] improves water quality through several functional pathways.

3.1 Hydrology

The SPELBasin[®] system facilitates buffering of stormwater flows due to capillary action provided by the filtration media, and during dry periods plants draw the reserved water from the anaerobic (submerged) zone. This reserve volume is then retained during the next storm event.

3.2 Sediment

Several technologies and processes are incorporated into the SPELBasin[®] design to capture and retain sediment. For a grated inlet chamber, a Stormsack pit basket captures the coarse sediment as it enters. For a piped entry, a coarse filter cartridge settles sediment in the inlet chamber, minimising the chances of it entering the filter chamber. A proprietary blend of filter media maintains high hydraulic conductivity whilst filtering sediment from the treatment flow. As a final barrier, a geotextile surrounds the collection pipes to prevent sediment and filter media leaving the SPELBasin[®].

3.3 Nutrient Removal

Nutrients are observed in stormwater in particulate and dissolved forms. The relative percentages remain subject to further research, however, both forms are targeted by the SPELBasin[®] system.

3.3.1 Particulate nutrient removal

Particulate nutrients are captured via the same pathways as sediment, since they are typically strongly adsorbed to sediment.

3.3.2 Dissolved nutrient removal

The SPELBasin[®] technology utilises a proprietary media blend that has been designed to target dissolved phosphorus and nitrogen. As well as the physico-chemical properties of the media, the biofilter plants remove nutrients from the stormwater and provide microbial communities to biologically remove dissolved nutrients. As with all living assets, an establishment period is typical. This may vary from 6 – 18 months depending on the plant growth cycle and climatic conditions. Once established, the SPELBasin[®] system should operate constantly and consistently for as long as the plants and media are viable.

HEAD OFFICE

100 Silverwater Road
Silverwater NSW 2128

POSTAL

PO BOX 7138
Silverwater NSW 2128

EMAIL

sales@spel.com.au

ABN

83 151 832 629

spel.com.au

4 SPELBasin® Design

Unlike traditional biofilter design, it is not necessary to utilise drainage, transition and filter media layers. The SPELBasin® system is delivered with the proprietary media pre-mixed ready for installation into the prefabricated chamber. Of importance, however, is that the geotextile protecting the outer geogrid and internal collection pipes is not damaged during the media installation.

4.1 Outlet invert level (Saturated Zone)

The SPELBasin® system is designed to accommodate up to 300mm reservoir of water as a saturated/anaerobic layer at the bottom. The levels from this outlet to the receiving drainage network should be checked to ensure the outlet is free-draining.

As a secondary guide, the Facility for Advancing Water Biofiltration (FAWB, 2009) recommend calculating the saturated zone with the following equation;

$$D = 8x t$$

Where: D = depth of saturated zone (mm)
t = average of the longest annual dry period (days)

This level tends to determine the inlet level that runoff can enter the SPELBasin®.

4.2 Inlet invert level & type

The inlet level of the SPELBasin® system depends on the type of inlet structure;

- Kerb inlet;
- Grated inlet; and/or
- Pipe inlet.

Kerb and grated inlets have up to 150 mm of flexibility to match with surface levels. This also enables up to 150mm of extended detention within the SPELBasin® system.

Piped inlets have ~600 mm of flexibility to ensure the inlet pipe and outlet discharge to a free water surface. The exact dimensions will depend on the inlet pipe diameter, depth/cover and class.

4.3 Bypass

The SPELBasin® system is designed for flows that exceed the design treatment flow rate (TFR) to be bypassed externally. This is typically achieved by ensuring that when the inlet cannot carry any additional flow, flow is re-directed to a nearby/adjacent inlet pit.

If the SPELBasin® requires an underground pipe inlet type, the bypass can be formed into the inlet chamber, or as a separate pit.

4.4 Inlet and outlet configurations

Multiple configurations are possible with the SPELBasin® depending on the site constraints. Some examples are indicated below.

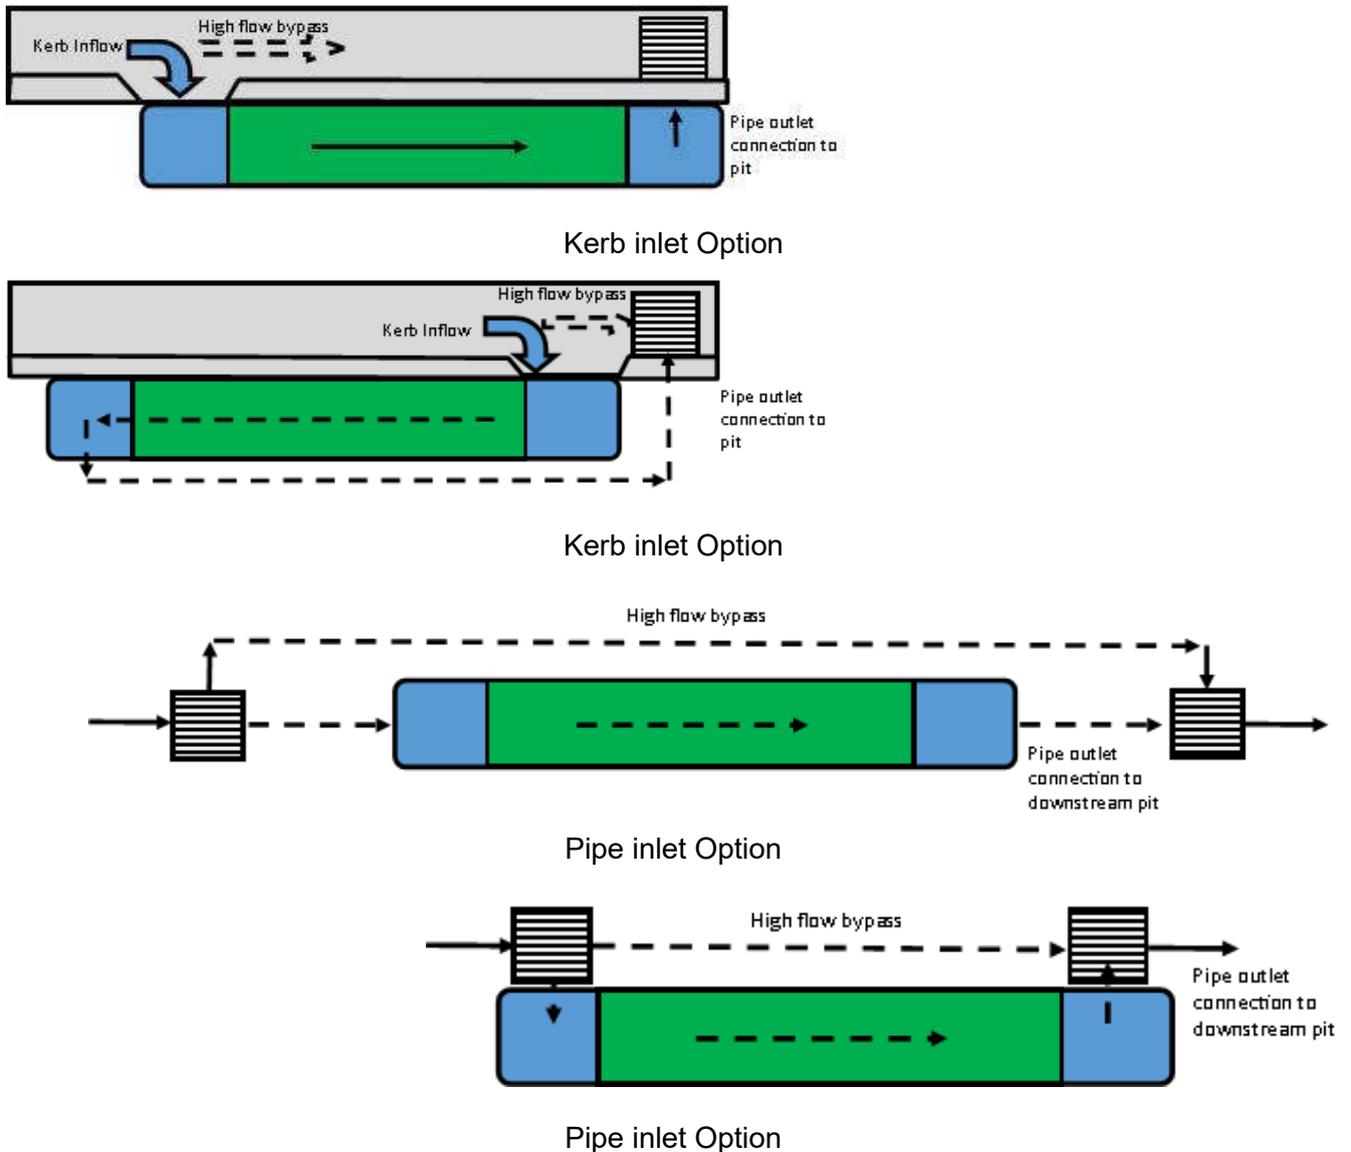


FIGURE 5. SPELBASIN® INLET AND OUTLET CONFIGURATIONS

4.5 SPELBasin® Surface level set-down

Pedestrian and vehicular safety is important when integrating the SPELBasin® into the roadscape and cityscape. Therefore, designers need to consider the interchange between the filter surface and surrounding landscape.

| Application area | Surface level set-down |
|-----------------------|--|
| Roadscape | Maximum 200 mm |
| Footpaths/bikeways | Maximum 500 mm |
| Parkland, landscaping | Maximum 1000 mm where barriers or fencing are included |

4.6 SPELBasin® edge interface

The SPELBasin® system is supplied in precast concrete or prefabricated fibreglass structures. This results in a vertical edge to the technology. Also, there is a defined inlet to the system. Designers should allow for surface gradients to transport flow to the inlet location, and provide edge treatments (barriers, vegetation, batters) to discourage pedestrian and/or vehicular access to the filter media and outlet chambers.

Edge treatments could incorporate treated-timber sleepers, rock blocks, fencing, bollards or barrier planting.



FIGURE 6. SPELBASIN® WITH TIMBER SLEEPER EDGE TREATMENT

4.7 SPELBasin® Plant selection

Plant selection for the SPELBasin® is very similar to that of a traditional biofilter. Wetland grasses and shrubs are most suitable with a core species list provided below.

Table 2. Recommended Plant Species for SPELBasin®

| Species name | Common name | Plant habit |
|---|---|----------------------------|
| <i>Banksia robur</i> | Swamp Banksia | Small tree/shrub |
| <i>Callistemon viminalis</i> <i>hybrids</i> | Little John, Wee Johnnie, Harkness, Kings Park Special Bottlebrush | Small-medium tree/shrub |
| <i>Ficinia nodosa</i> (also known as <i>Isolepsis nodosa</i>) | Knobby club-sedge | Sedge/grass |
| <i>Gahnia aspera</i> | Red-fruited saw-sedge | Sedge |
| <i>Imperata cylindrica</i> | Blady grass | Grass |
| <i>Juncus usitatus</i> | Common Rush | Sedge/grass |
| <i>Lomandra hystrix</i> | River mat-rush | Grass |
| <i>Lomandra longifolia</i> | Spiny-headed mat-rush | Grass |
| <i>Melaleuca thymifolia</i> | Thyme honey myrtle | Shrub |
| <i>Melaleuca linariifolia</i> | “Snow in Summer” | Shrub |
| <i>Melaleuca bracteata</i> | Black tea-tree | Small tree |

Due to the high permeability of the SPELBasin® filter media, it may be necessary to irrigate newly planted systems until they are established, or reliable, regular rainfall is received.

Planting density is recommended to be 6 plants/sqm, and a variety of species should be used, instead of a monoculture.

5 Maintenance

The SPELBasin® system requires regular, simple maintenance to ensure its long-term effectiveness.

5.1 Access

The inlet chamber and Stormsack are the areas of the SPELBasin® that will require the most attention for regular maintenance. These items are likely to capture the highest loads of sediment and litter (organic and anthropogenic) and therefore will need cleaning on a regular basis (eg. Quarterly). Whilst these are not large areas, a Stormsack full of sediment and organic matter can be heavy, and so access to the inlet chamber should be provided.

Suitable access could consist of a concrete or compacted crusher dust pathway, pavers, or permeable paving.

5.2 Inlet structures

The inlet to the SPELBasin® may be via a kerb inlet or surface grate. Regular inspections should check that these remain clear of debris and free-flowing.

Underground pipe inlets to the SPELBasin® should also be checked to ensure debris is not settling in the upstream pipe, and if observed, should be removed during the inlet chamber maintenance.



FIGURE 7. SPELBASIN® KERB AND GRATED INLET

5.3 Sediment & Litter removal

Removal of sediment and litter from the inlet chamber and Stormsack may require a small vehicle and hoist, as well as vacuum education to ensure optimal operation of the SPELBasin®. Since the inlet is a relatively small volume, a commercial wet/dry vacuum may be sufficient, removing the need for large education trucks. The inlet coarse sediment filter is the SPEL coalescer media cartridge. Annual removal of the cartridge and low pressure rinse will maintain the treatment flow rate. The coarse sediment filter cartridge should be replaced on a 10 year interval.

Depending on the design of the SPELBasin®, the material captured in the Stormsack and inlet chamber should be mostly dry.

HEAD OFFICE

100 Silverwater Road
Silverwater NSW 2128

POSTAL

PO BOX 7138
Silverwater NSW 2128

EMAIL

sales@spel.com.au

ABN

83 151 832 629

spel.com.au

5.4 Slotted-drainage pipes

Filtered stormwater is captured by slotted drainage pipes within the SPELBasin[®] filter media. These are installed within a geofabric sleeve, and protrude above the media surface. Each end of the drainage pipes is capped with an inspection fitting.



Maintenance activities should ensure that sediment is not collecting in the slotted pipes, and flow to the outlet is not obstructed.

If treatment flow is reduced and occlusion due to sedimentation in the pipes is suspected, they can be jet-rodged and vacuum-cleaned at the outlet chamber. If this breakthrough of sediment is observed in the drainage pipes, it may be an indicator that replacement of the filter media is required.

FIGURE 8. SPELBASIN[®] INSPECTION OPENINGS

5.5 Filter Media Hydraulic Conductivity

The proprietary filter media blend in the SPELBasin[®] has a high hydraulic conductivity compared with traditional biofilters. This allows the SPELBasin[®] to treat higher flows per square metre, whilst maintaining high pollutant removal rates. To ensure treatment flow rates are maintained, annual maintenance inspections should check that the water level of the SPELBasin[®] returns to the “standby” level after 2 hours. If the water level remains high after more than 2 hours, replacement of the media may be required.

Filter media infiltration rates (hydraulic conductivity) may be tested using the FAWB methodology, or the AS1547:2000 Australian Standard Constant Head test. This should be conducted in at least two locations, and boreholes at two depths (150mm & 400mm).

Contact SPEL Stormwater for more details.

HEAD OFFICE

100 Silverwater Road
Silverwater NSW 2128

POSTAL

PO BOX 7138
Silverwater NSW 2128

EMAIL

sales@spel.com.au

ABN

83 151 832 629

spel.com.au

6 MUSIC Model Application

The Model for Urban Stormwater Improvement Conceptualization (MUSIC) is a software tool that simulates the behaviour of stormwater quality in urban catchments. This tool is widely used in the Stormwater Industry by professionals and this section provides a consistent and uniform approach for modelling SPELBasin® in all urban development projects. It is the aim here to provide a step by step guide for the assessment authorities to ensure the model is a correct representation of the ultimate installed products in the field.

SPELBasin® is represented in MUSIC using a **generic** node. Field research of the SPELBasin® found that the observed parameters were outside the algorithm bounds inside MUSIC and therefore to build a model that reflected the observed results required model inputs vastly different to those implemented onsite. Therefore, treatment efficiency of the SPELBasin® **generic** node is instructed by the observed field performance. The design treatment flow rate (TFR) of a standard SPELBasin® module is 10 L/s with removal rates of 99% GP, 86% TSS, 65% TP, 50% TN. The following inputs are recommended for the **Generic** node;

| Pollutant | Input Concentration | Output Concentration | Removal % |
|------------------|---------------------|----------------------|-----------|
| Gross Pollutants | 100 | 1 | 99 |
| TSS | 100 | 14 | 86% |
| TP | 5 | 1.75 | 65% |
| TN | 50 | 25 | 50% |

FIGURE 9. SPELBASIN® MUSIC NODE FOR GROSS

POLLUTANTS REMOVAL

The screenshot shows the 'Properties of SPELBasin Node (10L/s)' dialog box in the MUSIC software. The dialog is set to 'Gross Pollutants (kg/ML)' as the target element. The 'Transfer Functions' section is set to 'Both'. The 'Concentration Based Capture Efficiency' table shows an input of 100 and an output of 1. The 'Flow Based Capture Efficiency' table shows an inflow of 1.0000 and a % capture of 100.0000. The background shows a node diagram with a 'Bypass Junction', a 'SPELBasin Node (10L/s)', and a 'Junction'.

7 Summary

The SPELBasin® modular biofiltration system provides treatment of stormwater in a package that can be quickly and simply installed. The SPELBasin® has been independently field tested in accordance with the Stormwater Australia SQIDEP protocol at Sippy Downs, Queensland. The SPELBasin® provides pollutant reductions of **86% TSS, 65% TP, 50% TN** and should provide the same 99% gross pollutant reduction of traditional biofilters. A **Generic MUSIC# node** for modelling SPELBasin® is recommended and scaling the technology in increments of **10L/s per module** should maintain the pollutant removal performance observed in the Australian Field monitoring.

Maintenance is required as per SPEL's Operation & Maintenance Manual to ensure optimal performance.

HEAD OFFICE

100 Silverwater Road
Silverwater NSW 2128

POSTAL

PO BOX 7138
Silverwater NSW 2128

EMAIL

sales@spel.com.au

ABN

83 151 832 629

spel.com.au

8 References

1. Bratieres, K., Fletcher, T.D., Deletic, A. and Zinger, Y., 2008, *Nutrient and sediment removal by stormwater biofilters: A large-scale design optimisation study*, **Water Research**, 42, 2008, pp3930-3940, Elsevier, doi:10.1016/j.watres.2008.06.009
2. Davis, B.S. and Birch, G.F., 2008, *Catchment-wide assessment of the cost-effectiveness of stormwater remediation measures in urban areas*, **Environmental Science & Policy**, 12, 2008, pp84-91, Elsevier, doi:10.1016/j.envsci.2008.09.004
3. Facility for Advancing Water Biofiltration, 2009, Guidelines for Filter Media in Biofiltration Systems, Version 3.01, Monash University, June 2009.
4. Hunt, W.F., Smith, J.T., Jadlocki, S.J., Hathaway, J.M. and Eubanks, P.R., 2007, *Pollutant Removal and Peak Flow Mitigation by a Bioretention Cell in Urban Charlotte, N.C.*, **Environmental Engineering**, Vol 134, No. 5, May 1, 2008, ASCE, DOI: 10.1061/ASCE0733-93722008134:5403
5. LeCoustumer, S., Fletcher, T.D., Deletic, A., Barraud, S., and Poelsma, P., 2012, *The influence of design parameters on clogging of stormwater biofilters: A large-scale column study*, **Water Research**, 46, 2012, pp6743-6752, Elsevier, doi:10.1016/j.watres.2012.01.026
6. Mullaney, J., Lucke, T. and Truman, S.J., 2015, A review of benefits and challenges in growing street trees in paved urban environments. *Landscape and Urban Planning*, 134, 2015, pp157-166, Elsevier, <http://dx.doi.org/10.1016/j.landurbplan.2014.10.013>
7. University of the Sunshine Coast, 2018. Evaluation of treatment performance of SPEL Basin at Sippy Downs. University of Sunshine Coast Stormwater Research Group.
8. Stormwater Australia, 2018. Stormwater Quality Improvement Device Evaluation Protocol, v1.3.
9. SPEL Stormwater, 2019. SPEL Basin Technical Drawings.
10. Water by Design, 2010, A Business Case for Best Practice Urban Stormwater Management, Version 1.1, September 2010.
11. Water by Design, 2012, Maintaining Vegetated Stormwater Assets, Version 1. Healthy Waterways.