

SPELFlow

N12 ADS HDPE water tight & perforated drainage pipe





APPLICATIONS

- Railways
- Mine sites
- Civil stormwater
- Conveyance
- Detention
- Irrigation

ADS N12 HDPE pipe is a dual wall (outer corrugated wall and smooth inner wall) pipe. The pipe is engineered with a compound of high density virgin polyethylene resin to provide high strength material properties.

A patented gasket held in place by a ceramic band increases its sealing effectiveness as internal or external hydrostatic pressure increases. The in-line bell and spigot joint, factory fitted gasket and light weight provides for quick installation. ADS pipe has been extensively tested and certified against Australian and international standards, including AASHTO, IAB, AS2566.1 and AS5100.2.




FEATURES

- Supports AS5100.2 highway and railway loads
- Installation and design in accordance with AS2566
- Low Manning's due to smooth polyethylene interior
- Excellent abrasion and chemical resistance
- Light weight and robust
- No bell hole dig required due to constant outside diameter along the joint

BENEFITS

- Structural – low cover (300mm min) and deep burial installations. The HDPE grade used has a 50% higher long term modulus than PE 100. Better polymer allows less material to be used to carry AS5100.2 live loads safely long term. Our 435400C HDPE and pipe design values are independently audited by expert government employed material and structural engineers.
- Low risk – light weight, fewer joints, reduced OHS issues for installation. Pipe requires no extra couplers, grout or other sealants for installation due to built-in bell and factory-installed gasket. This means fewer components to risk performance.
- Cost – installation cost savings with light weight pipes. Less heavy equipment required and the pipes can easily be cut to the required lengths.
- Reduced wastage – not susceptible to bell chipping and cracking common to concrete pipes. Cut lengths can be used to begin the next pipe run.
- Low CO2 – significantly lower embodied energy compared to concrete, PVC and polypropylene pipes.
- Hydraulic efficiency – low Manning's n due to smooth polyethylene interior.
- Durability – 435400C Cell Class HDPE with 2% carbon black has a design life of 100 years and is recyclable.
- Chemical – abrasion resistant and suitable for acid sulfate soils and highly abrasive flows.

SPECIFICATIONS

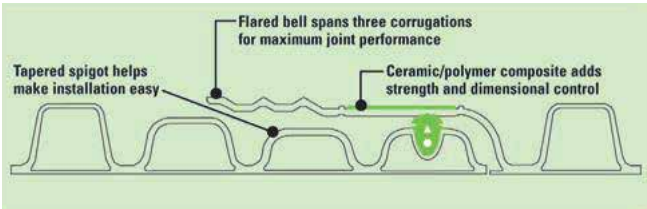

PART CODE	NOMINAL I.D. (mm)	ACTUAL I.D. (mm)	O.D. (mm)	LENGTHS (m)	WEIGHTS (kg)
100mm ADS N12 Pipe	100	104	120	5.6	4.1
150mm ADS N12 Pipe	150	152	176	5.6	7.7
200mm ADS N12 Pipe	200	200	233	5.6	14
250mm ADS N12 Pipe	250	251	287	5.6	21
300mm ADS N12 Pipe	300	308	367	5.6	29
375mm ADS N12 Pipe	375	380	448	5.6	42
450mm ADS N12 Pipe	450	459	536	5.6	58
600mm ADS N12 Pipe	600	612	719	5.6	100
750mm ADS N12 Pipe	750	762	892	5.6	146
900mm ADS N12 Pipe	900	914	1059	5.6	192
1050mm ADS N12 Pipe	1050	1054	1212	5.6	240
1200mm ADS N12 Pipe	1200	1209	1361	5.6	284
1500mm ADS N12 Pipe	1500	1514	1664	5.3	424




SPELFlow

N12 ADS HDPE water tight & perforated drainage pipe

NSW HEAD OFFICE 100 Silverwater Rd, Silverwater NSW 2128 PO Box 7138, Silverwater NSW 1811 P: +61 2 8705 0255 P: 1300 773 500 E: nsw.sales@spel.com.au	QLD MAIN OFFICE 130 Sandstone Pl, Parkinson QLD 4115 P: +61 7 3271 6960 P: 1300 773 500 E: qld.sales@spel.com.au QLD SUNSHINE COAST BRANCH 19-27 Fred Chaplin Circuit, Bells Creek, QLD 4551 P: 1300 773 500 E: qld.sales@spel.com.au	VIC & TAS OFFICE 897 Wellington Rd Rowville VIC 3178 P: +61 3 5274 1336 P: 1800 810 139 E: sales@spel.com.au VIC GEELONG BRANCH 70 Technology Close, Corio, P: +61 3 5274 1336 P: 1800 810 139 E: sales@spel.com.au
SA OFFICE 9 Hampden Road, Mount Barker SA 5251 P: 1300 773 500 E: sales@spel.com.au	WA OFFICE 2 Modal Crescent Canning Vale WA 6155 P: +61 8 9350 1000 P: 1800 335 550 E: sales@spel.com.au	NZ OFFICE AUCKLAND 100 Montgomerie Road Airport Oaks P: +64 9 276 9045 E: sales@spel.com.au
NZ OFFICE WANGANUI 43 Heads Road Wanganui New Zealand P: +64 6 349 0088 E: sales@spel.com.au	NZ OFFICE WELLINGTON 41 Raiha St Porirua Wellington New Zealand P: +64 4 239 6006 E: sales@spel.com.au	PHILIPPINES OFFICE METRO MANILA Unit 2210 Lumiere Residences Pasig Boulevard, Pasig City P: +61 2 8705 0255 P: 1300 773 500 E: sales@spel.com.au
SINGAPORE OFFICE 512 Chai Chee Lane, #06-04 Bedok Industrial Estate, Singapore 469028 P: +61 2 8705 0255 P: 1300 773 500 E: sales@spel.com.au	UK OFFICE UNITED KINGDOM Lancaster Rd Shrewsbury SY1 3NQ UK P: +44 (0)1743 445200 E: sales@spel.com.au	USA OFFICE CLEVELAND 4548 Industrial Parkway Cleveland, Ohio 44135 P: +61 2 8705 0255 P: 1300 773 500 E: sales@spel.com.au

We believe clean water is a right not a privilege and we work to ensure a joy in water experience for you with your children and grandchildren.



spelstormwater
joy in water

100 Silverwater Rd, Silverwater NSW 2128 Australia

Phone: (02) 8705 0255

Email: sales@spel.com.au

spel.com.au

SPEL Stormwater accepts no responsibility for any loss or damage resulting from any person acting on this information. The details and dimensions contained in this document may change, please check with SPEL Stormwater for confirmation of current specifications.